



**sterling range**

[www.first4seals.com](http://www.first4seals.com)



**single spring**

mechanical seal range

Copyright © 2005 first4seals plc  
DOC / F4S 5018 12/2005

Reference Issue • L - UK - F4SSPRING - 01

first4seals™ is a Trademark of first4seals plc.

first4seals plc recognise all trademarks and trademark names as the property of the owner.

first4seals plc, mount street, bradford, west yorkshire. bd3 9sn united kingdom

Tel: +44 (0) 1274 720775 Fax: +44 (0) 1274 729022

email: [seals@first4seals.com](mailto:seals@first4seals.com) - web: [www.first4seals.com](http://www.first4seals.com)

## TYPE SM32 MECHANICAL SEALS

Type SM32 Seals are 'O' Ring mounted with a Conical Spring and are available in a choice of face materials. They are suitable for a variety of general duties and arduous applications requiring high PV value face combinations.



### Benefits

- Robust – Due to simple construction
- Self adjusting – 'O' Ring slides along the shaft to allow for wear
- Long life – Face materials can be chosen to suit the application
- Non clogging – Due to open single spring design
- Simple fitting – Just push on to shaft

All metal parts in Stainless Steel as standard.

### Service Capability

- Maximum Speed – 20m/sec\*
- Maximum Pressure – 10 bar\*
- Temperature – -40°C to +200°C
- Media – Dependant on materials


\* See P.V. Curves for maximum speed/pressure combination

### NOTE

P.V. Curves for water at 20°C


### Materials

- Rotary Face (3) – Carbon, Reaction Bonded Silicon Carbide, Tungsten Carbide
- Stationary Face (4) – Ceramic, Reaction Bonded Silicon Carbide, Tungsten Carbide
- Spring (1) – 316 Stainless Steel
- Metal Parts (6) – 316 Stainless Steel
- Elastomers (2, 5) – Nitrile, EP, Viton

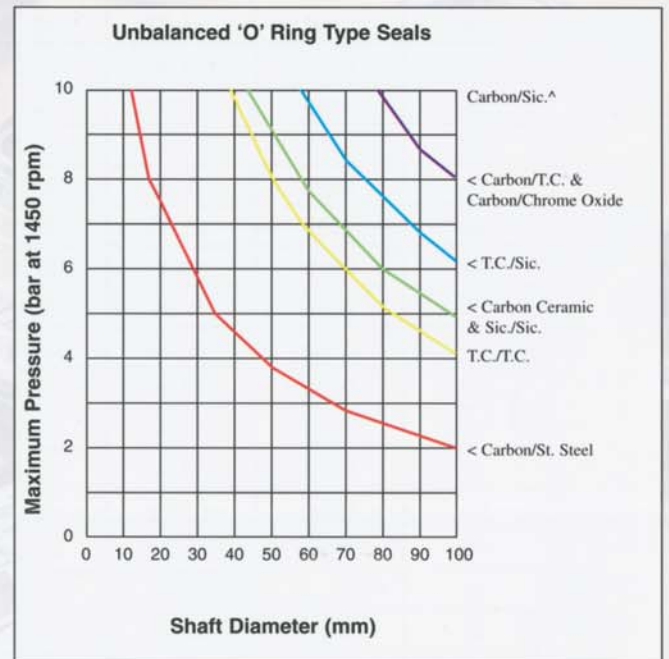

**OTHER MATERIALS AVAILABLE TO SPECIAL ORDER**

## SEAL TYPE SM32

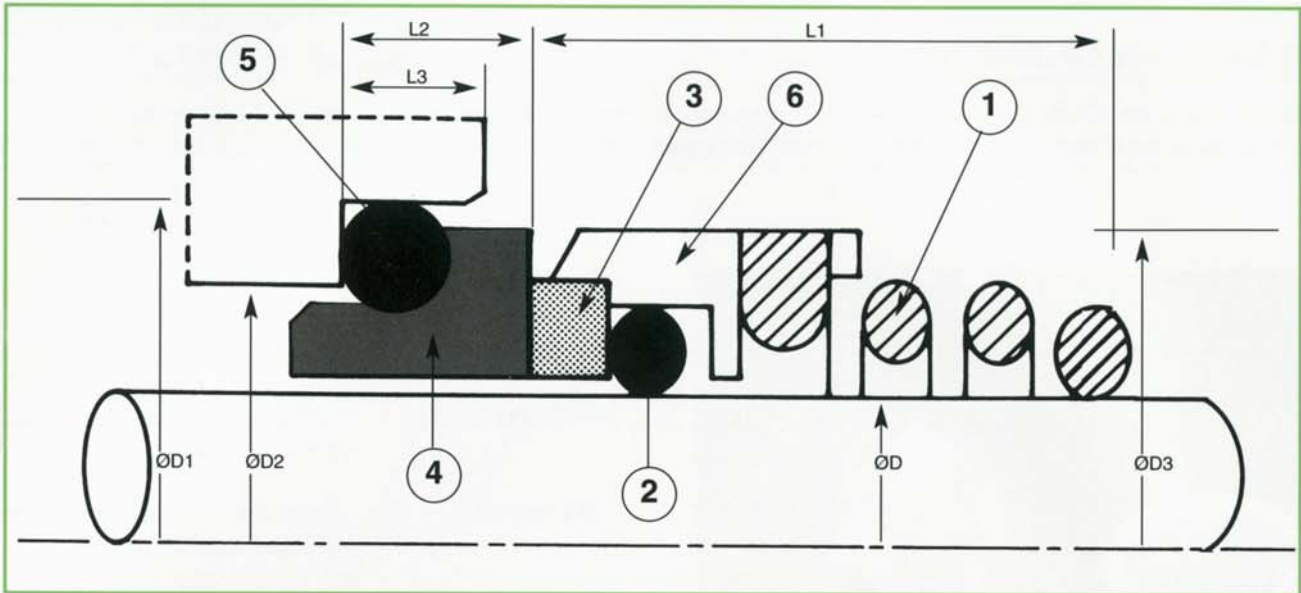

Metric Shaft Size D	Size Code	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	L3 mm
10	0100	19.20	15.50	19.00	15.50	6.60	5.00
12	0120	21.60	17.50	21.00	15.50	5.60	5.00
14	0140	24.60	20.50	23.00	15.50	5.60	5.00
15	0150	24.60	20.50	24.00	15.50	6.60	5.00
16	0160	28.00	22.00	26.00	17.50	7.50	6.50
18	0180	30.00	24.00	29.00	18.50	8.00	6.50
19	0190	31.00	25.00	31.00	20.00	7.50	6.50
20	0200	35.00	29.50	31.00	20.00	7.50	6.50
22	0220	35.00	29.50	33.00	21.50	7.50	6.50
24	0240	38.00	32.00	35.00	23.00	7.50	6.50
25	0250	38.00	32.00	36.00	24.50	7.50	6.50
26	0260	40.00	34.00	37.00	24.50	8.00	6.50
28	0280	42.00	36.00	40.00	24.50	9.00	6.50
30	0300	45.00	39.20	43.00	24.50	10.50	6.50
32	0320	48.00	42.20	46.00	28.00	10.50	6.50
35	0350	52.00	46.20	49.00	28.00	11.00	6.50
38	0380	55.00	49.20	53.00	31.00	10.30	6.50
40	0400	58.00	52.20	56.00	34.00	10.80	6.50
42	0420	62.00	53.30	59.00	35.00	12.00	8.00
43	0430	63.00	54.30	59.00	35.00	12.00	8.00
45	0450	64.00	55.30	61.00	36.50	11.60	8.00
48	0480	68.40	59.70	64.00	42.00	11.60	8.00
50	0500	69.30	60.80	66.00	43.00	11.60	8.00
55	0550	75.40	66.50	71.00	47.00	13.30	8.00
58	0580	78.40	69.50	76.00	50.00	13.30	8.00
60	0600	80.40	71.50	78.00	51.00	13.30	8.00
65	0650	85.40	76.50	84.00	52.00	13.00	8.00
68	0680	91.50	82.70	88.00	53.00	13.70	8.00
70	0700	92.00	83.00	90.00	54.00	13.00	8.00
75	0750	99.00	92.20	98.00	55.00	14.00	8.00
80	0800	104.00	95.20	100.00	58.00	15.00	8.00